

# BigPak®

## 40x48W TP-TC

Thermoformed HDPE  
Twin Sheet Construction

### 01 / Details

#### FEATURES

- Ever-Lock2® - provides unit security and eliminates need for stretch wrapping
- Accommodates a triple wall corrugated sleeve
- Conveyable

#### OPTIONS


- One or multiple stripes in 48" direction
- Wide range of pallet stripe colors
- With or without Ever-Lock2®
- Leg drain holes
- Custom logos



Twin-Sheet Thermoformed



Plastic



Ever-Lock2®



Nestable Conveyable Pallet



Nestable Conveyable Cover



Fiberboard Z-fold

### 02 / Specifications


PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
		L	W	H			FORK	FLOOR		STD.	HC			
BP4048W TP	Twin Sheet Pallet	48" 1,219 mm	40" 1,016 mm	3.75" 95.25 mm	23 lbs 10.43 kg	Black	1,200 lbs 545 kg	7,500 lbs 1,409 kg	100" 2,540 mm	40	44	1,200/ 30 Skids	800/ 20 Skids	880/ 20 Skids
BP4048W TC	Twin Sheet Cover	48" 1,219 mm	40" 1,016 mm	2.375" 60.33 mm	13 lbs 5.90 kg	Black	1,200 lbs 545 kg	7,500 lbs 1,409 kg	100" 2,540 mm	40	44	1,200/ 30 Skids	800/ 20 Skids	880/ 20 Skids

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.


# Big Pak<sup>®</sup> 40x48W TP-TC

## SPECIFICATIONS

### CONVEYABLE PALLET

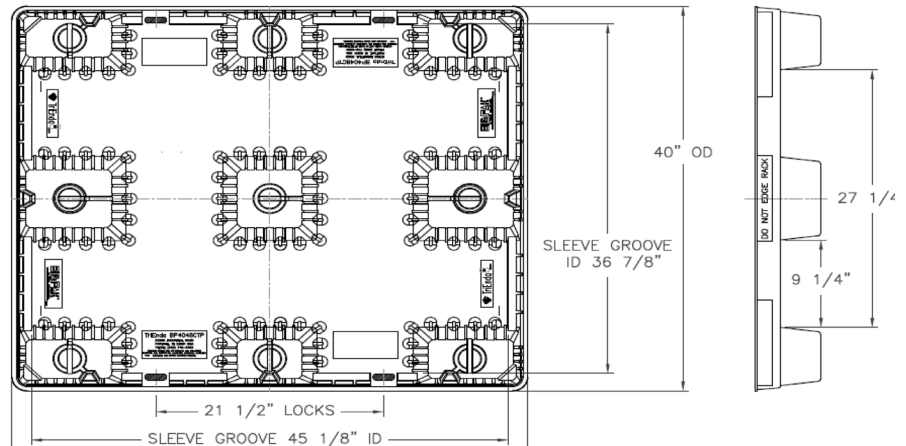

### CONVEYABLE COVER

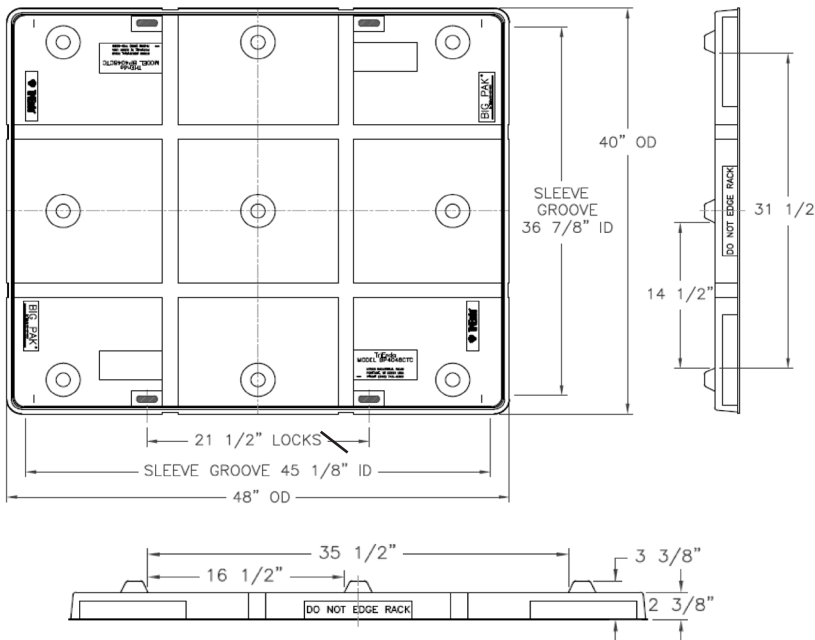

### SLEEVE SHIPPING INFORMATION

QTY PER STACK	SLEEVE HEIGHT
2 High in Trailer	44.5" (1,130 mm)
3 High in Trailer	28.5" (724 mm)
4 High in Trailer	20.25" (514 mm)

### PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



### CONTACT US

N7660 Industrial Road Portage, WI 53901  
[www.triend.com](http://www.triend.com) | [sales@triend.com](mailto:sales@triend.com)  
 1-800-356-8150

### PALLET BUYBACK PROGRAM

