

BigPak®

44x54B SP

Thermoformed HDPE
Single Sheet Construction

01 / Details

FEATURES

- Pallet and lid are interchangeable
- Minimizes storage space, reduces shipping costs
- Lightweight for better ergonomics

OPTIONS

- Ever-Lok® provides unit security and eliminates stretch wrapping
- One or multiple stripes in 54.75" direction
- Wide range of stripe colors
- Collapsible sleeves
- Leg drain holes
- Custom logos



Twin-Sheet Thermoformed



Plastic



Ever-Lok®



Nestable Pallet



Interlocking Pallet Legs



Fiberboard Z-fold




02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
		L	W	H			FORK	FLOOR		STD.	HC			
BP4454B SP	Single Sheet Pallet	54.75" 1,391 mm	44.5" 1,130 mm	6.625" 168 mm	22 lbs 9.98 kg	Black	800 lbs 364 kg	4,000 lbs 1,818 kg	100" 2,540 mm	50	54	1,100/ 22 Skids	800/ 16 Skids	864/ 16 Skids

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

Big Pak[®] 44x54B SP

SPECIFICATIONS

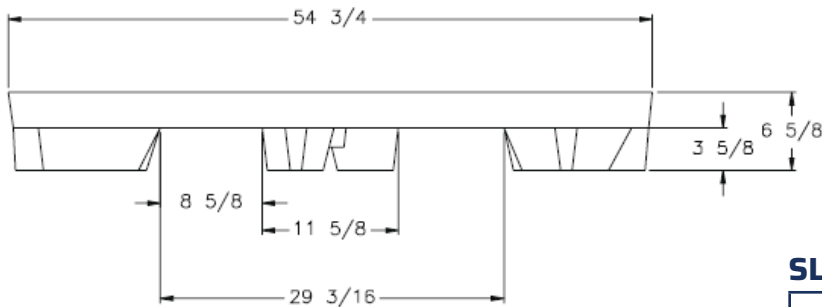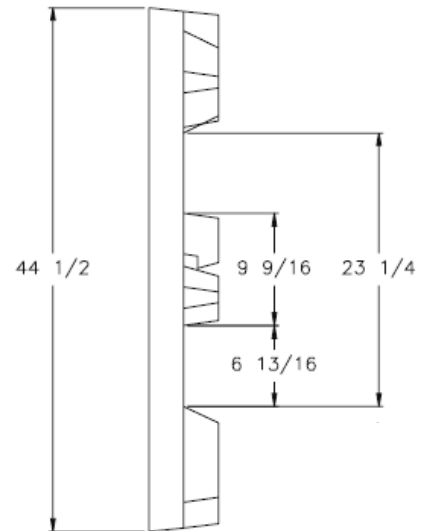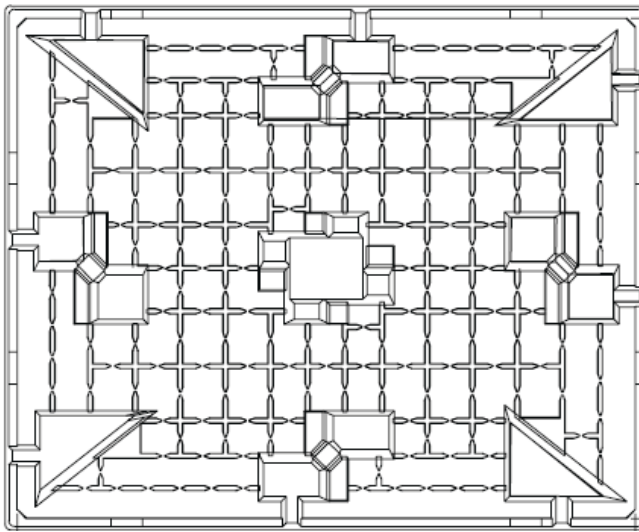

SLEEVE SHIPPING INFORMATION

QTY PER STACK	SLEEVE HEIGHT	SLEEVE I.D.
2 High in Trailer	44.375" (1,127 mm)	53" x 42.5"
3 High in Trailer	28.25" (718 mm)	53" x 42.5"
4 High in Trailer	20.25" (514 mm)	53" x 42.5"

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy
Clean



Sanitary



Weather
Resistant



Impact
Resistant



4-Way
Forklift/jack
Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

