


Commercial Pallet*

40x48

Thermoformed HDPE
Twin Sheet Construction

*formerly known as the DC2 Pallet

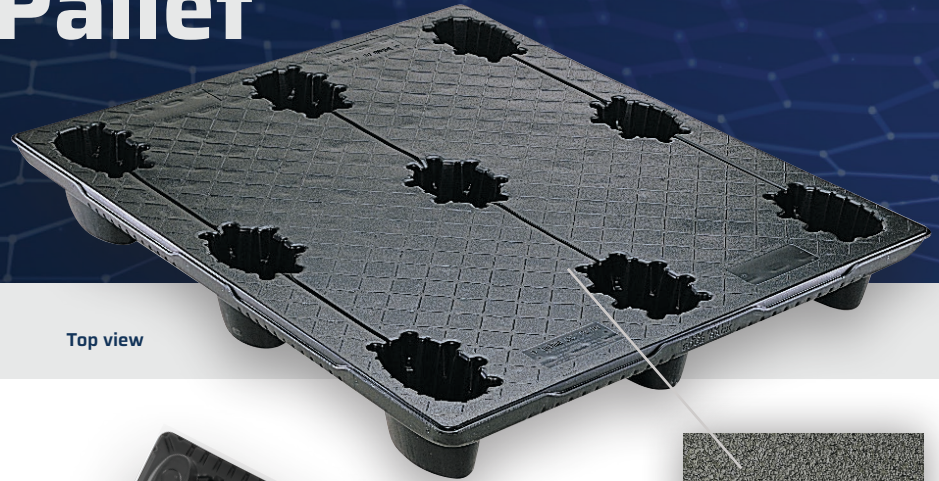

Top view

01 / Details

FEATURES

- Compatible design fits with similar models
- Impact absorbing TriMax™ design for added stiffness and durability
- Lightweight for better ergonomics
- Oval leg design for minimized damage
- Nestable 3:1
- Plastic:Wood

OPTIONS

- RFID
- TruGrip™ highest coefficient of friction
- Decals
- Drain holes



Bottom view



TruGrip™
An anti-skid surface like no other

Introducing TruGrip™ offering the highest COF available on the market using a proprietary rubber-like material. Prevents slippage of boxes on fork tines and on floors.



Oval Legs



Nestable Pallet Design


02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		QTY PER STACK		QTY 53' TLD	QTY 48' HC
		L	W	H			DYNAMIC	STATIC	STD.	HC		
DC2 40x48	Universal Twin Sheet Pallet	48" 1,219 mm	40" 1,016 mm	5.88" 149 mm	20 lbs 9 kg	Black	2,500 lbs 1,134 kg	6,500 lbs 2,948 kg	52	52	1,560/30 Skids	1,040/20 Skids




Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

Commercial Pallet 40x48

SPECIFICATIONS

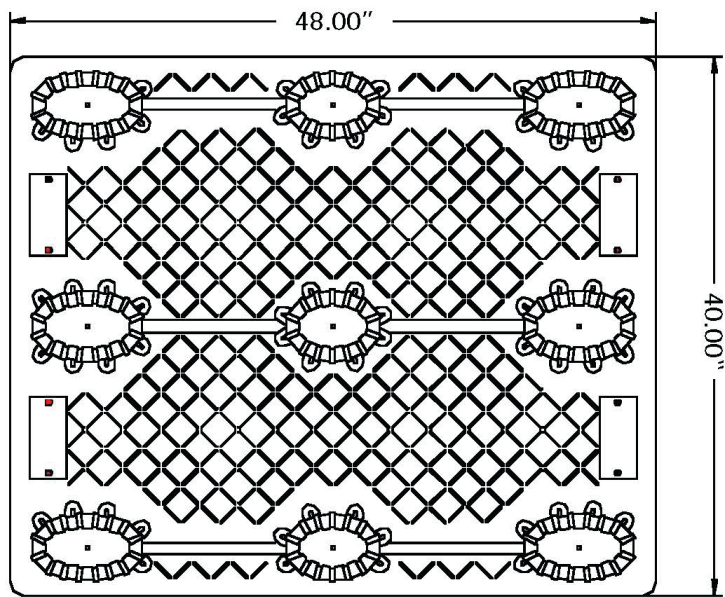

TOP VIEW

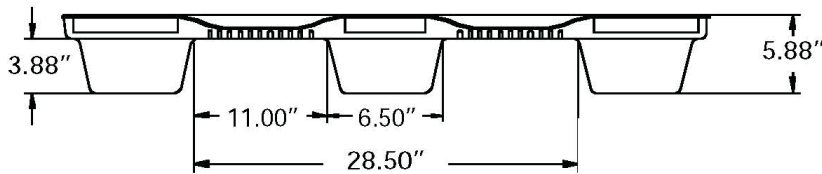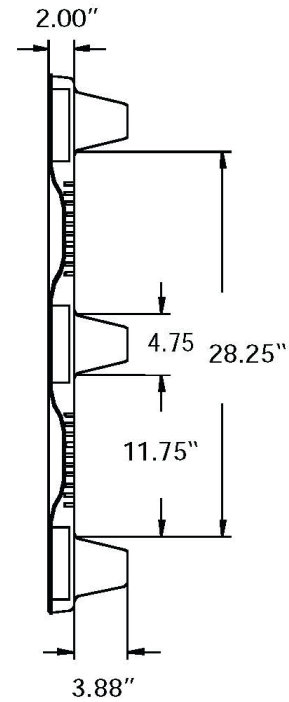

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy
Clean



Sanitary



Weather
Resistant



Impact
Resistant



4-Way
Forklift/jack
Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

